

**SIEMENS**

*Ingenuity for life*



## SINAMICS V20

The cost-effective, reliable  
and easy-to-use converter for  
basic applications

[siemens.com/sinamics-v20](https://www.siemens.com/sinamics-v20)

# SINAMICS V20

## The perfect solution for basic applications

### SINAMICS V20, the versatile converter for basic demands

Today, in an increasing number of applications in plant and machinery construction, individual automation and drive solutions are demanded that automate simple motion sequences with low associated requirements.

With its compact SINAMICS V20, the basic performance converter, Siemens offers a simple and cost-effective drive solution for these types of applications. SINAMICS V20 sets itself apart with its quick commissioning times, ease of operation, robustness and cost efficiency.

With seven frame sizes, it covers a power range extending from 0.12 kW up to 30 kW (1/6 hp up to 40 hp).

### Minimize your costs

Engineering, commissioning and operating costs as well as those in operation must be kept as low as possible. You have precisely the right answer with our SINAMICS V20. To increase energy efficiency, the converter is equipped with a control technique to achieve optimum energy efficiency through automatic flux reduction. Not only this, it displays the actual energy consumption and has additional, integrated energy-saving functions. This allows energy consumption to be slashed drastically.

### Highlights

#### Easy to install

- Push-through and wall mounting – side-by-side possible for both
- USS and Modbus RTU at terminals
- Integrated braking chopper for 7.5 kW to 30 kW (10 hp up to 40 hp)
- Electromagnetic compatibility (EMC) category C1/C2

#### Easy to use

- Parameter loading without power supply
- Integrated application and connection macros
- Keep Running mode for uninterrupted operation
- Wide voltage range, advanced cooling design and coated PCBs increase robustness

#### Easy to save money

- ECO mode for V/f, V<sup>2</sup>/f / Hibernation mode
- Monitoring energy and water flows
- Optimized for solar panel powered pump system
- High overload and low overload mode for FSE

Power range	0.12 kW to 30 kW (1/6 hp up to 40 hp)
Voltage range	1AC 200 V ... 240 V (–10% / +10%)* 3AC 380 V ... 480 V (–15% / +10%)
Control modes	V/f   V <sup>2</sup> /f   FCC   V/f multi-point

\* Single-phase devices can also be connected to two phases of a 3-phase 230 V supply system.


You can find detailed information here:

<http://support.industry.siemens.com/cs/document/109476260>



# Typical applications

## Pumping, ventilating and compressing




- Centrifugal pumps
- Radial/axial fans
- Compressors
- Solar pumps
- ...

### Additional advantages:

- High availability through automatic restart and flying restart after power failures
- Broken belt detection by monitoring the load torque
- Pump protection against cavitation
- Hammer start and blockage clearing modes for clogged pumps
- PID controller for process values (e.g. temperature, pressure, level, flow)
- PID auto tuning to optimize controller parameters
- Hibernation mode stops the motor when demand is low
- Motor staging extends the flow range by adding two more fixed-speed drives (cascade)
- Frost and condensation protection prevents moisture in motors under extreme environmental conditions



## Moving




- Belt conveyors
- Roller conveyors
- Chain conveyors
- Treadmills
- Bucket conveyors
- ...

### Additional advantages:

- Soft, jerk-free acceleration reduces the stress on the gear units, bearings, drums and rollers
- Super torque start for conveyor belts with high breakaway torque
- Dynamic behavior by using braking resistor or DC braking
- Direct control of mechanical holding brake
- Broken belt detection by monitoring the load torque
- Precise stopping with Quick Stop (switch-off positioning) independently from the control cycle



## Processing




- **Single drives in the process industry** such as mills, mixers, kneaders, crushers, mechanical presses, agitators, centrifuges
- **Single drives in commercial appliances** such as kitchen ovens, mixers, washing machines
- **Main drives in machines with mechanically coupled axes** such as ring spinning machines, braiding machines for textiles, ropes and cables


### Additional advantages:


- Frost and condensation protection prevents moisture in motors under extreme environmental conditions
- Higher productivity with uninterrupted production due to Keep Running mode
- Exchange of regenerative energy via the DC link
- Super torque start for machines with a high breakaway torque




# Easy to install




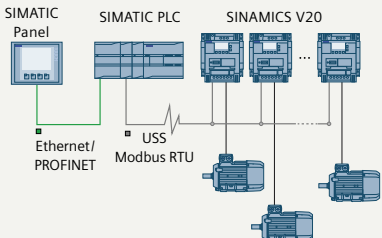
	SINAMICS V20 feature	Your benefits
<b>Easy, and all from a single source</b> 	<p>Together with SIMATIC PLC/HMI, tested and ready-to-run application examples to connect a V20 converter to a controller.</p>	<ul style="list-style-type: none"> <li>• Different application examples can be downloaded free of charge from the online support portal. For more information, also see page 8 or go directly to <a href="http://siemens.com/sinamics-applications">http://siemens.com/sinamics-applications</a></li> </ul>

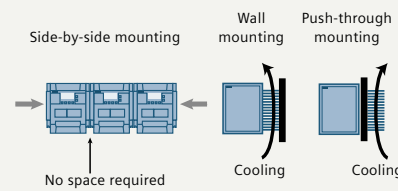Installation		
 <p>The diagram shows three installation methods for the SINAMICS V20 drive. On the left, 'Side-by-side mounting' shows three drive units installed side-by-side in a rack, with arrows indicating they fit together without gaps. Below it, 'No space required' is written. In the middle, 'Wall mounting' shows a drive unit mounted on a wall with a cooling fan on the back. Below it, 'Cooling' is written. On the right, 'Push-through mounting' shows a drive unit mounted on a wall with a cooling fan on the back, and a cooling fan on the front. Below it, 'Cooling' is written.</p>	<p>Compact design, side-by-side mounting and flexible device installation for both wall mounting and push-through mounting.</p> <p>Operation without additional option modules possible.</p>	<ul style="list-style-type: none"><li>• Compact installation allows smaller cabinets to be used</li><li>• Push-through mounting allows the cabinet to be cooled more easily</li><li>• Can be run “out-of-the-box” without other options</li><li>• Basic operator actions at a built-in BOP (Basic Operator Panel)</li><li>• Frame sizes FSAA and FSAB (1AC 230 V) 24% smaller compared to previous frame size FSA within the same power range</li></ul>




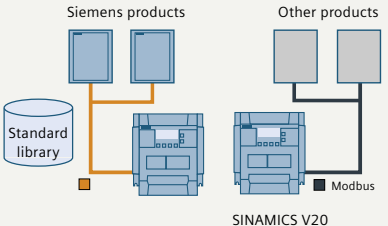
Communication		
 <p>Siemens products</p> <p>Standard library</p> <p>SINAMICS V20</p> <p>Other products</p> <p>Modbus</p>	<p>The communication port is available at the terminals.</p> <p>The preset parameters of the USS and Modbus RTU are defined in the connection macro.</p>	<ul style="list-style-type: none"><li>• Easy integration into existing systems</li><li>• Easy integration into micro automation systems</li><li>• Easier commissioning through standard libraries and connection macros</li><li>• Full flexibility of Modbus RTU settings widen to communicate with controller</li><li>• Simple connection to a control system (SIMATIC PLC)</li></ul>

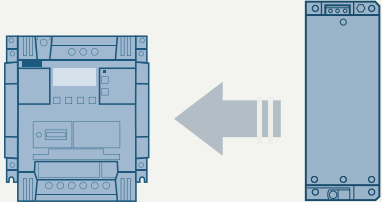EMC category C1		
	<p>SINAMICS V20 in frame sizes FSAA and FSAB, 1AC 230 V with integrated category C1 EMC filter.</p>	<ul style="list-style-type: none"><li>• Can be operated in EMC-sensitive environments such as residential areas, without requiring additional external filters</li></ul>

# Easy to use

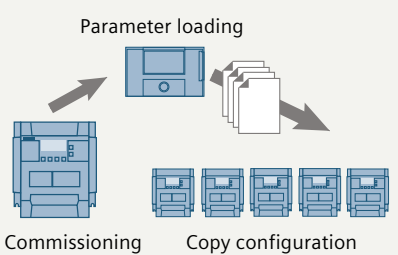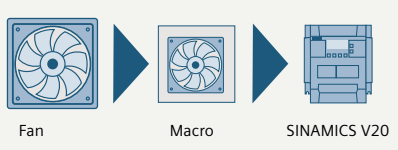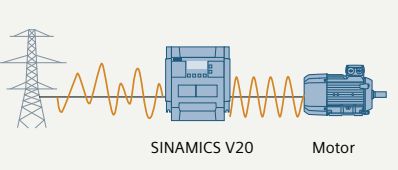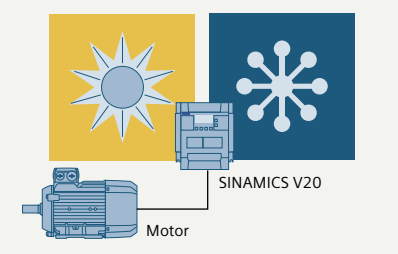	SINAMICS V20 feature	Your benefits
<b>Parameter cloning</b>		
 <p>The diagram illustrates the parameter cloning process. At the top, a 'Parameter loading' step shows a parameter loader (a small blue device) connected to a stack of white cards. Below this, a 'Commissioning' step shows a SINAMICS V20 drive unit. To the right, a 'Copy configuration' step shows a row of five SINAMICS V20 drive units. Arrows indicate the flow of data from the parameter loader to the commissioning unit and then to the copy configuration units.</p>	<p>Parameter settings can be easily transferred from one unit to another even without power supply by using the parameter loader.</p>	<ul style="list-style-type: none"> <li>• Less technical support required</li> <li>• Short commissioning time</li> <li>• The product is delivered to the customer already preset</li> </ul>
<b>Macro approach</b>		
 <p>The diagram shows the macro approach. It starts with a 'Fan' icon, followed by a 'Macro' icon (a fan inside a square), and then a 'SINAMICS V20' drive unit. Arrows connect the fan to the macro and the macro to the drive unit, indicating that the macro is used to configure the drive unit for a specific application like a fan.</p>	<p>Connection and application macros to simplify I/O configuration and make the appropriate settings.</p>	<ul style="list-style-type: none"> <li>• Shorter training and commissioning time</li> <li>• Integrated and optimized application setting</li> <li>• Simple connection and application macros can be selected instead of configuring long complicated parameter lists</li> <li>• Errors caused by wrong parameter settings can be avoided</li> </ul>
<b>Keep Running mode</b>		
 <p>The diagram illustrates the Keep Running mode. It shows a power line with a fluctuating waveform (representing unstable supply) connected to a SINAMICS V20 drive unit, which is then connected to a motor. The drive unit is shown with a wavy line between it and the motor, indicating its role in stabilizing the power supply to the motor.</p>	<p>The function provides higher productivity in production by automatic adaptation in the case of unstable line supply.</p>	<ul style="list-style-type: none"> <li>• Stable operation under difficult line supply conditions</li> <li>• Higher productivity through prevention of interruptions of the production line</li> <li>• Adaptation to application-relevant reactions through flexible definition in case of fault/alarm</li> </ul>
<b>Robustness</b>		
 <p>The diagram shows the robustness of the SINAMICS V20 drive. It features a yellow sun icon and a blue snowflake icon, representing a wide operating temperature range. Below these, a SINAMICS V20 drive unit is connected to a motor. The drive unit is labeled 'SINAMICS V20' and the motor is labeled 'Motor'.</p>	<p>Wider voltage range, better cooling design and coated PCB increase robustness of the drive in difficult environments.</p>	<ul style="list-style-type: none"> <li>• Operation possible when the line supply voltage fluctuates</li> <li>• Reliable operation for line voltages: <ul style="list-style-type: none"> <li>– 1AC 200 V ... 240 V (–10% / +10%)</li> <li>– 3AC 380 V ... 480 V (–15% / +10%)</li> </ul> </li> <li>• Operation at ambient temperatures between –10 °C and 60 °C</li> </ul>

# Easy to save money

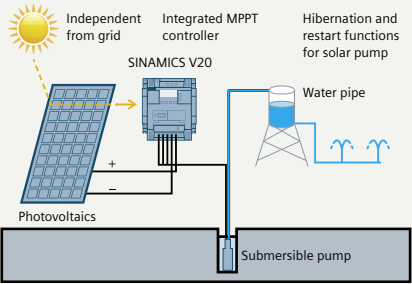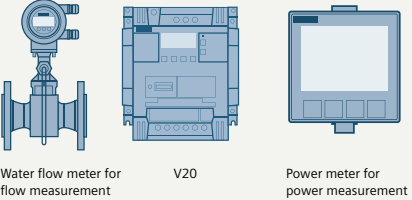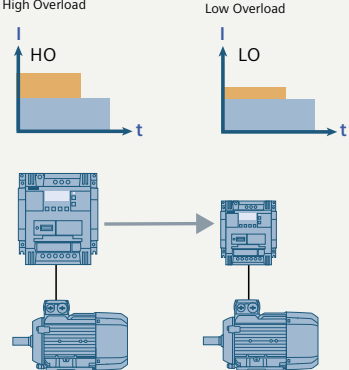	SINAMICS V20 feature	Your benefits
<b>ECO mode / Hibernation mode – Energy reduction during operation and standby</b>		
 <p><sup>1)</sup></p>	<p>Integrated ECO mode for V/f and V<sup>2</sup>/f automatically adapts the flux to save energy. The energy consumption can be shown in kWh, CO<sub>2</sub> or even in the local currency.</p> <p>Hibernation mode, converter and motor are only activated when used by the plant or machine.</p>	<p>ECO mode:</p> <ul style="list-style-type: none"> <li>• Energy saving during low dynamic load cycles</li> <li>• Tells end users the actual energy that has been saved</li> </ul> <p>Hibernation mode:</p> <ul style="list-style-type: none"> <li>• Smart hibernation saves energy</li> <li>• Extended lifetime of motor</li> </ul>
<b>Optimized for solar panel powered pump system</b>		
	<p>The integrated MPPT controller utilizes the solar energy to a maximum and the optimized hibernation function is used to control a motor.</p>	<ul style="list-style-type: none"> <li>• No additional MPPT controller necessary</li> <li>• Independent of the public grid</li> <li>• Energy saving and maximum utilization of the solar panel energy</li> <li>• Fully automated solution</li> </ul>
<b>Integrated energy and water flow monitoring</b>		
 <p>Water flow meter for flow measurement      V20      Power meter for power measurement</p>	<p>Energy consumption and savings are monitored without the need for power measurement equipment.</p> <p>The volume of water pumped by a SINAMICS V20 drive is calculated without requiring a sensor according to pump characteristic curve in solar pump application.</p>	<ul style="list-style-type: none"> <li>• Intuitive values of power consumption and savings without additional investments for measurement equipment</li> <li>• Values can be shown as kWh, CO<sub>2</sub> or as a currency</li> <li>• Requires no water flow meter</li> <li>• Single SINAMICS V20 pump station with report function to show total water flow and operational status of the entire pump system</li> </ul>
<b>Cost saving for low overload applications</b>		
	<p>SINAMICS V20 FSE (22 kW and 30 kW) have two different load cycles.</p> <ul style="list-style-type: none"> <li>• Low Overload (LO): 110% I<sub>L</sub><sup>2)</sup> for 60 s (cycle time: 300 s)</li> <li>• High Overload (HO): 150% I<sub>H</sub><sup>3)</sup> for 60 s (cycle time: 300 s)</li> </ul>	<ul style="list-style-type: none"> <li>• With the low overload cycle, the converter can reach a higher output current and power. A smaller converter can be used.</li> <li>• Optimally designed for variable applications: <ul style="list-style-type: none"> <li>– Low Overload for applications with a low dynamic response (continuous duty)</li> <li>– High Overload for applications with a high dynamic response (cyclic duty)</li> </ul> </li> </ul>

<sup>1)</sup> Application and machine-type dependent.

<sup>2)</sup> The output current I<sub>L</sub> is based on the duty cycle for low overload (LO).

<sup>3)</sup> The output current I<sub>H</sub> is based on the duty cycle for high overload (HO).

# Integrated and innovative support

## DT Configurator – fast product selection and ordering



### The DT Configurator supports you with:

- Selecting the best drive based on the application
- The subsequent ordering process

### The DT Configurator supplies you with:

- A drive that is optimally tailored to your requirements
- 2D/3D models
- Operating instructions
- Data sheets

You can directly order the selected components through the Industry Mall – the Siemens e-commerce website – and without having to duplicate entries. In order to avoid making mistakes while ordering, the order number is checked to ensure that it is correct.

Link to Internet page:

<https://siemens.com/dt-configurator>

## Industry Mall – comprehensive online information and services



### The Industry Mall supports you with:

- Selecting products, services and trainings

### The Industry Mall supplies you with:

- A product selection of the complete and up-to-date Siemens automation and drive technology product spectrum
- System configuration
- Download of CAX data, data sheets and schematic diagrams
- Online shopping cart orders
- Price and order overview
- Availability check and order tracking

Link to Internet page:

<https://mall.industry.siemens.com>

# Complete motion control solutions from Siemens

SINAMICS V20 and SIMATIC – Siemens offers comprehensive solutions from a single source for general motion control applications. Through the optimized interaction between SIMATIC control and SINAMICS drive technology, as shown in our “SINAMICS Application Examples,” we can provide you with highly efficient systems.


## Siemens application examples comprise:

- Ready-to-run application examples, including wiring diagrams, parameter descriptions
- Sample configurations for connecting SINAMICS with SIMATIC, including hardware, software and wiring examples, installation instructions for the supplied S7 project, drive parameterization, and HMI sample projects

## Customer benefits:

- Basis for customer-specific configurations
- Optimal leveraging of TIA advantages
- Free download via the Online Support Portal:  
<https://siemens.com/sinamics-applications>

## Example: Speed control of a V20 with S7-1200 (TIA Portal) via USS® protocol/MODBUS RTU with HMI

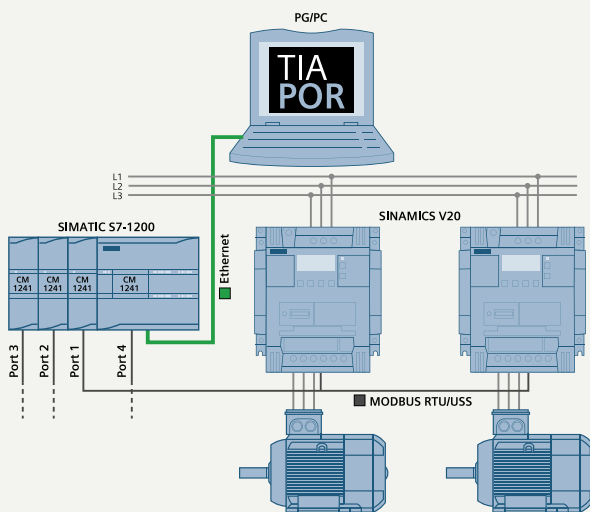

### Task

#### USS communication

- Cyclic write/read access of a SIMATIC S7-1200 to selected SINAMICS V20 process/control data, the transmission of which is supported by a STEP 7 instruction
- Connections of up to 64 drives are possible

#### MODBUS communication

- Cyclic write/read access of a SIMATIC S7-1200 to selected SINAMICS V20 process/control data that can be triggered via a STEP 7 instruction via MODBUS register numbers

### Solution

With up to three communication modules CM1241 added to the SIMATIC S7-1200 and one communication board CB1241, a USS® or MODBUS communication can be established to SINAMICS V20 drives.

#### USS communication

- Up to 16 drives can be operated per port. The user function blocks use STEP 7 instructions USS\_PORT, USS\_DRV, USS\_RPM and USS\_WPM


#### MODBUS communication

- Up to 32 drives can be operated per port (with repeaters, up to 247). The user function blocks use the STEP 7 instructions MB\_COMM\_LOAD and MB\_MASTER

Link to Internet page:

<https://siemens.com/sinamics-applications>

# Overload capability characteristics

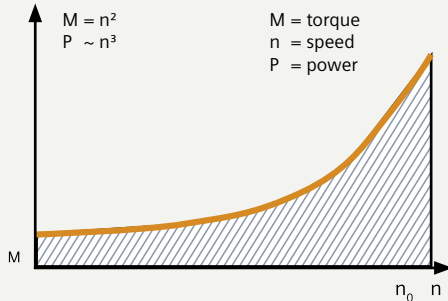


**Low Overload (LO)** is generally used for applications demanding a low level of dynamic performance (continuous duty), square-law torque characteristic with low breakaway torque and low speed precision.

For example: centrifugal pumps, radial/axial fans, reciprocating blowers, radial compressors, vacuum pumps, agitators, ...

## Overload capability

Low overload (LO) 110%  $I_L^{(1)}$  for 60 s within a cycle time of 300 s

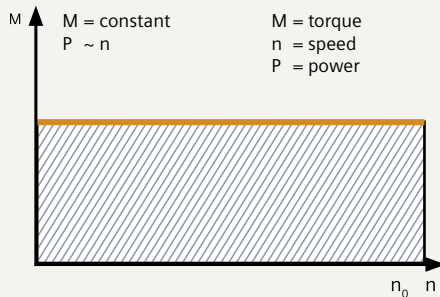

**High Overload (HO)** is generally used for applications demanding a higher dynamic performance (cyclic duty) as well as constant torque characteristics with a high breakaway torque.

For example: conveyor belts, geared pumps, eccentric worm pumps, mills, mixers, crushers, vertical conveying equipment, centrifuges, ...

## Overload capability

High overload (HO) 150%  $I_H^{(2)}$  for 60 s within a cycle time of 300 s

<sup>1)</sup> The output current  $I_L$  is based on the duty cycle for low overload (LO).

<sup>2)</sup> The output current  $I_H$  is based on the duty cycle for high overload (HO).

Easy accessibility from outside the cabinet.



V20 BOP  
(Basic Operator Panel)



V20 BOP Interface



Frame size FSAA

# Technical data




Power and control	
Voltage	1AC 230 V: 1AC 200 V ... 240 V (–10% / +10%) <sup>3)</sup> 3AC 400 V: 3AC 380 V ... 480 V (–15% / +10%)
Maximum output voltage	100% of input voltage
Supply frequency	50 / 60 Hz
Line supply type	TN, TT, TT earthed line, IT <sup>1)</sup>
Power range	1AC 230 V 0.12 ... 3.0 kW (1/6 ... 4 hp) 3AC 400 V 0.37 ... 30 kW (1/2 ... 40 hp)
cos φ / Power factor	≥ 0.95 / 0.72
Overload capability	up to 15 kW: High Overload (HO): 150% I <sub>N</sub> for 60 s within a cycle time of 300 s from 18.5 kW: Low Overload (LO): 110% I <sub>L</sub> for 60 s within a cycle time of 300 s High Overload (HO): 150% I <sub>N</sub> for 60 s within a cycle time of 300 s
Output frequency	0 ... 550 Hz resolution: 0.01 Hz
Efficiency factor	98%
Control modes	Voltage / frequency control mode: linear V/f, square law V/f, multi-point V/f Flux current control mode: FCC
Standards	
Standards	CE, cULus, RCM, KC
EMC standards, radiated emissions and disturbance voltage (conducted emissions)	<b>EN61800-3 category C1, 1<sup>st</sup> environment (residential):</b> • 1AC 230 V 0.12 to 0.75 kW with integrated EMC filter, or unfiltered with external line filter, shielded cables ≤ 5 m <b>EN61800-3 category C2, 1<sup>st</sup> environment (domestic):</b> • 1AC 230 V 1.1 to 3 kW with integrated EMC filter, shielded cables ≤ 25 m • 3AC 400 V without integrated EMC filter with external line filter, shielded cables FSA <sup>2)</sup> up to FSE ≤ 25 m <b>EN61800-3 category C3, 2<sup>nd</sup> environment (industrial):</b> • 3AC 400 V with integrated EMC filter, shielded cables FSA ≤ 10 m, FSB up to FSD ≤ 25 m, FSE ≤ 50 m
Features	
Energy saving	<ul style="list-style-type: none"> <li>• ECO mode</li> <li>• Hibernation mode</li> <li>• Energy consumption monitoring</li> <li>• Integrated MPPT (maximum power point tracking) controller</li> </ul>
Ease of use	<ul style="list-style-type: none"> <li>• Connection and application macro</li> <li>• Parameter cloning</li> <li>• Keep Running mode</li> <li>• USS/Modbus RTU communication</li> <li>• Customized default value</li> <li>• List of modified parameters</li> <li>• Converter status at fault</li> <li>• Automatic restart</li> <li>• Flying start</li> <li>• DC-link voltage control</li> <li>• I<sub>max</sub> control</li> </ul>
Application	<ul style="list-style-type: none"> <li>• PID controller</li> <li>• BICO function</li> <li>• Hammer start</li> <li>• Super torque mode</li> <li>• Blockage clearing mode</li> <li>• Motor staging</li> <li>• Flexible boost control</li> <li>• Wobble function</li> <li>• Slip compensation</li> <li>• Dual ramp</li> <li>• Adjustable PWM modulation</li> </ul>
Protection	<ul style="list-style-type: none"> <li>• Frost protection</li> <li>• Condensation protection</li> <li>• Cavitation protection</li> <li>• Kinetic buffering</li> <li>• Load failure detection</li> </ul>

<sup>1)</sup> 1AC 230 V FSAA/AB unfiltered devices as well as 3AC 400 V unfiltered devices, can be operated on an IT network.

<sup>2)</sup> To achieve 25 m shielded motor cable length also with FSA, unfiltered devices with external filter have to be used.

<sup>3)</sup> Single-phase devices can also be connected to two phases of a 3-phase 230 V supply system.  
You can find detailed information here:  
<http://support.industry.siemens.com/cs/document/109476260>



Signal inputs and outputs	
Analog inputs	AI1: bipolar current / voltage mode, 12-bit resolution AI2: unipolar current / voltage mode, 12-bit resolution Can be used as digital inputs
Analog outputs	AO1: 0 ... 20 mA
Digital inputs	DI1–DI4, optically isolated PNP/NPN selectable by terminal
Digital outputs	DO1: transistor output DO2: relay output – 250 V AC 0.5 A with resistive load – 30 V DC 0.5 A with resistive load

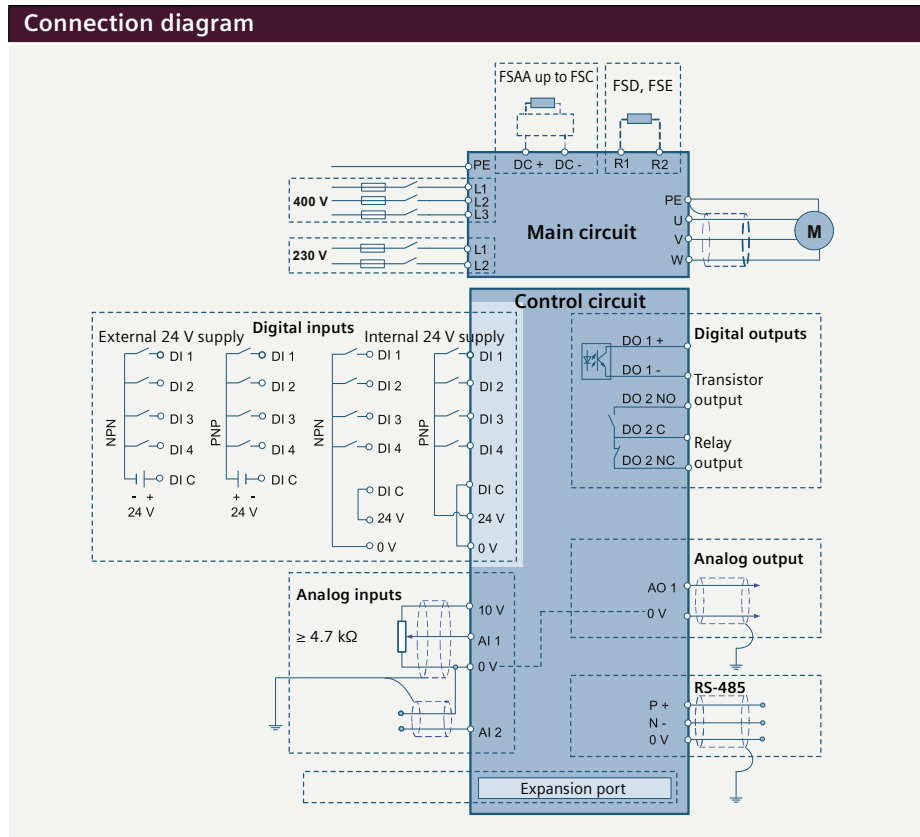

Mounting and environment	
Degree of protection	IP20
Mounting	Wall mounting, side-by-side mounting, push-through mounting for FSB, FSC, FSD and FSE
Cooling	<ul style="list-style-type: none"> <li>0.12 to 0.75 kW: convection cooling</li> <li>All frame size: power electronics cooled using heat sinks with external fan</li> </ul>
Surrounding temperature	In operation <ul style="list-style-type: none"> <li>–10 ... 60 °C (14 ... 140 °F)</li> <li>40 ... 60 °C (104 ... 140 °F) with derating</li> </ul> In storage <ul style="list-style-type: none"> <li>–40 ... 70 °C (–40 ... 158 °F)</li> </ul>
Relative humidity	95% (non-condensing)
Altitude	<ul style="list-style-type: none"> <li>Up to 4000 m above sea level</li> <li>1000 ... 4000 m: output current derating</li> <li>2000 ... 4000 m: supply voltage derating</li> </ul>
Motor cable length	<ul style="list-style-type: none"> <li>Unshielded cable: 50 m for FSAA up to FSD, 100 m for FSE</li> <li>Shielded cable: 25 m for FSAA up to FSD, 50 m for FSE</li> <li>Longer motor cables possible with output reactor (see options)</li> </ul>
Dynamic braking	Option module for FSAA to FSC; integrated for FSD and FSE

# Dimensions


## SINAMICS V20 device

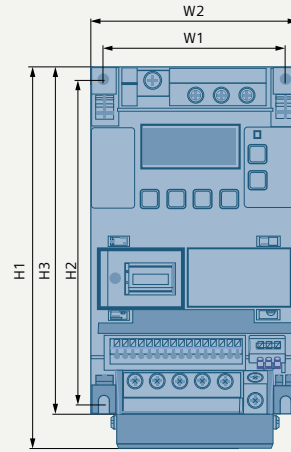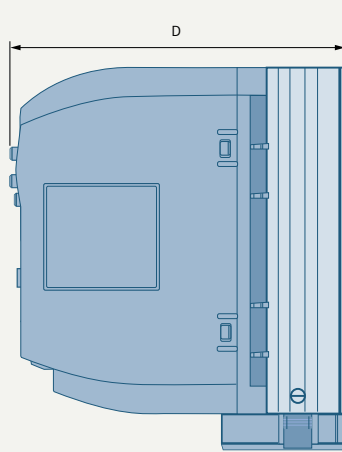


H1: Height with fan  
H2: Height without fan

Frame size	Width (mm)		Height (mm)			Depth (mm)	Weight (kg)
	W1	W2	H1	H2	H3	D	WT approx.
FSAA	58	68	–	132	142	107.8	0.7
FSAB	58	68	–	132	142	127.8	0.9
FSA	79	90	166	140	150	145.5	1.05
FSB	127	140	160	135	–	164.5	1.8
FSC	170	184	182	140	–	169	2.6
FSD	223	240	206.5	166	–	172.5	4.3
FSE	228	245	264.5	206	–	209	6.6


## V20 BOP (Basic Operator Panel)

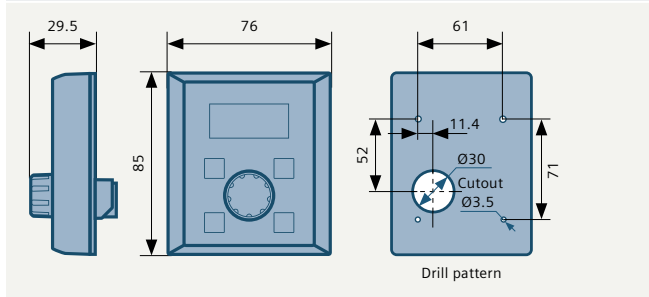

## V20 BOP (Basic Operator Panel) interface

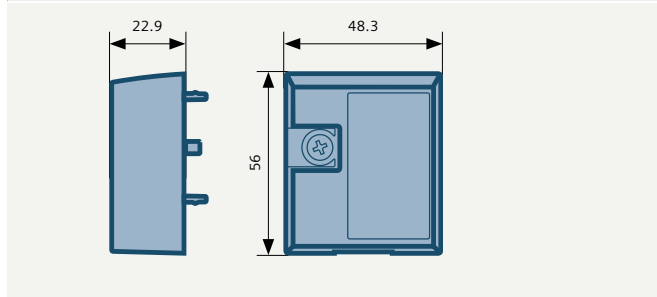

## V20 Parameter loader

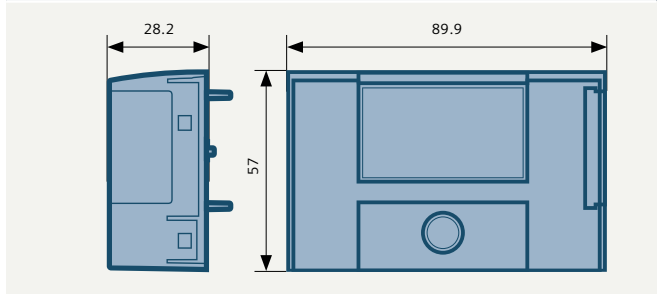

### 1AC 200 V ... 240 V options

		Braking resistors				Line reactors				Output reactors				Braking module				Line filter class B			
P <sub>rated</sub> (HO) kW 1AC 230 V	FS	W	H	D	WT	W	H	D	WT	W	H	D	WT	W	H	D	WT	W	H	D	WT
0.12	AA	72	230	43.5	1	75.5	200	50	0.5	75	200	50	1.3	90	150	88	0.71	73	200	43.5	0.5
0.25																					
0.37																					
0.55	AB																				
0.75																					
1.1	B	149	239		1.6	150	213		1.2	150	213	80	4.1					149	213	50.5	1
1.5																					
2.2	C																				
3		185	285	150	3.8	185	245		1.0	185	245		6.6					—			

### 3AC 380 V ... 480 V options

		Braking resistors				Line reactors				Output reactors				Braking module				Line filter class B			
P <sub>rated</sub> (LO) kW 3AC 400 V	FS	W	H	D	WT	W	H	D	WT	W	H	D	WT	W	H	D	WT	W	H	D	WT
0.37	A	105	295	100	1.48	125	120	71	1.1	207	175	73	3.4	90	150	80	0.71	73	202	65	1.75
0.55																					
0.75																					
1.1																					
1.5																					
2.2	B	105	345	100	1.80	125	140	71	2.1	207	180	73	3.9					100	297	85	4
3																					
4																					
5.5																					
7.5																					
11	C	175	345	100	2.73	125	145	91	2.95	257	235	115	11.2	integrated				140	359	95	7.3
15																					
22																					
30																					
	D	250	490	140	6.20	190	220	81	7.8	250	280	250	11.3					260	180	600	7.3
	E	270	515	175	7.4	275	455	84	13	250	280	250	11.3					335	200	175	7.5

FS = frame size, WT = weight in kg, W = width in mm, H = height in mm, D = depth in mm

We made it even smaller.  
The smallest SINAMICS  
converter saves on space –  
not on what counts.

Frame size FSAA and FSAB,  
1AC 230 V 0.12 to 0.75 kW  
with integrated EMC filter




Frame size FSAA



Frame size FSAB

# Full range of options

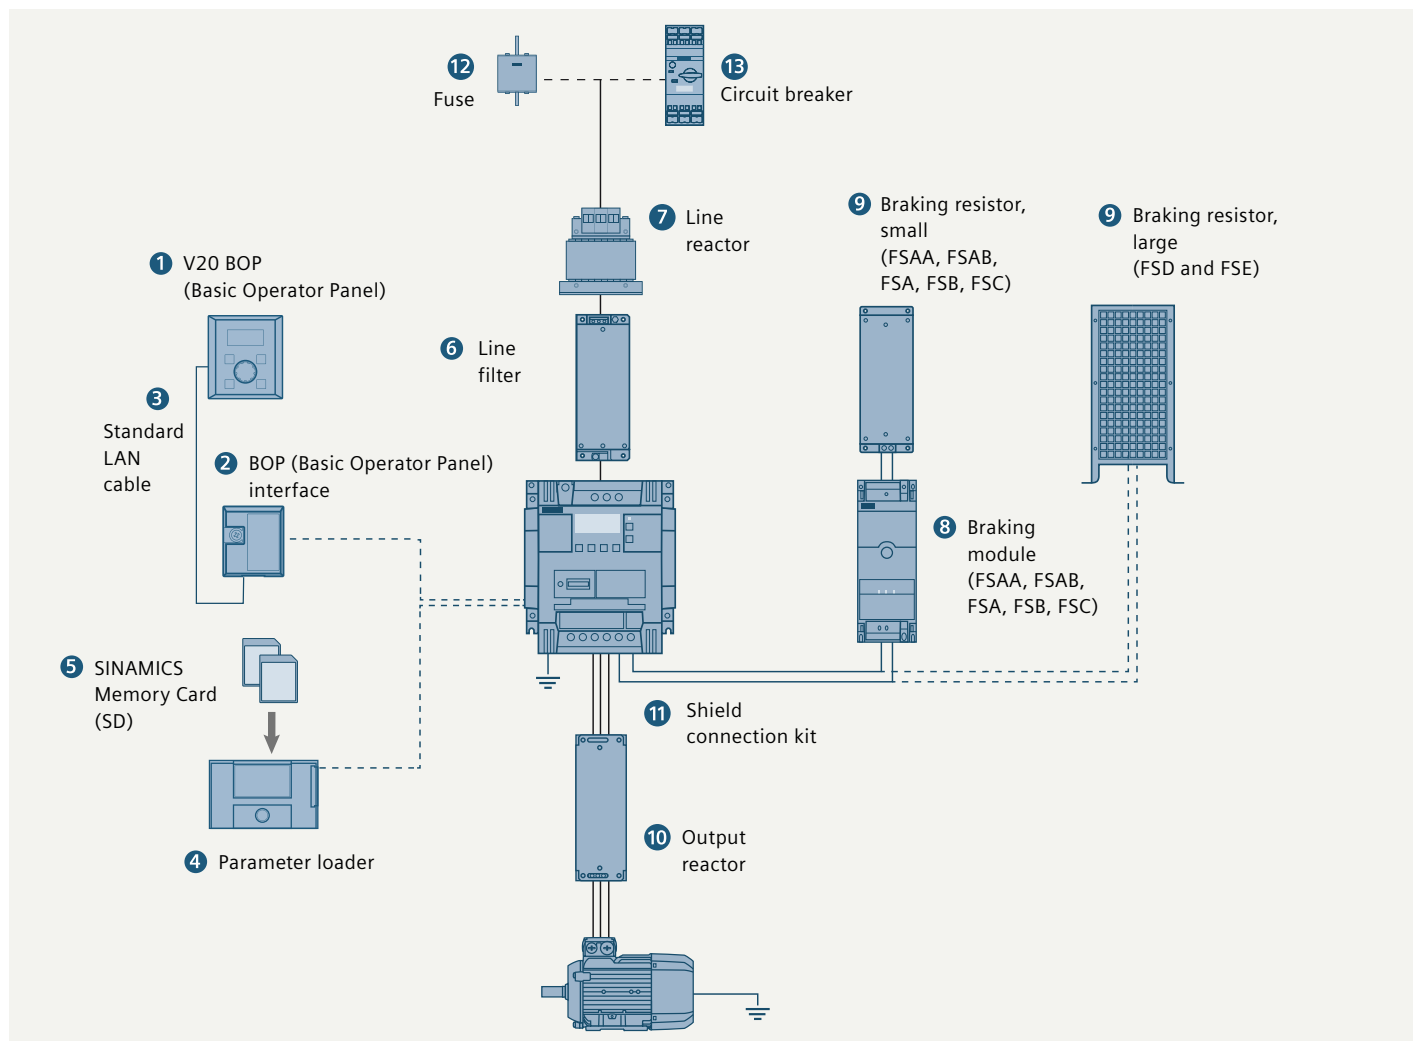

## Options

1	V20 BOP	Same function as the integrated BOP (Basic Operator Panel), but can be used for remote mounting. The value and setpoint are changed by rotating the wheel. For remote mounting with IP54 and UL Type 1 enclosure protection level from outside.
2	BOP interface	<ul style="list-style-type: none"> <li>Connection between converter and BOP</li> <li>RJ45 interface is compatible with standard LAN cable</li> </ul>
3	BOP cable	The cable is not included in the delivery. You can use any standard LAN cable with standard RJ45 connector.
4	Parameter loader	Up to 100 parameter sets with parameter settings can be written from the memory card (SD card up to 32 GB supported) to the converter or saved from the converter to the memory card without connecting the converter to the line supply.
5	SINAMICS Memory Card (SD)	Memory card (512 MB) (Standard SD cards up to 32 GB are supported)
6	Line filter	<ul style="list-style-type: none"> <li>Improved EMC performance</li> <li>Longer motor cable for FSAA, FSAB, FSA</li> </ul>

## Options

7	Line reactor	<ul style="list-style-type: none"> <li>Reduces the harmonic current</li> <li>Improves the power factor</li> <li>Recommended if input current (RMS value) is higher than the rated current of the converter</li> </ul>
8	Braking module	<ul style="list-style-type: none"> <li>Shortens the deceleration ramp time</li> <li>Suitable for 1AC 230 V and 3AC 400 V</li> <li>Adjustable duty cycle from 5% to 100%</li> <li>FSD and FSE already have an integrated braking unit</li> </ul>
9	Braking resistor	<ul style="list-style-type: none"> <li>Dissipates regenerative energy as heat</li> <li>5% duty cycle as default setting</li> </ul>
10	Output reactor	Longer motor cable: <ul style="list-style-type: none"> <li>3AC 400 V shielded and unshielded cable: 150 m for FSA to FSD, 200 m/300 m for FSE</li> <li>1AC 230 V shielded and unshielded cable: 200 m</li> </ul>
11	Shield connection kit	<ul style="list-style-type: none"> <li>Shield connection</li> <li>Strain relief</li> </ul>
12	Fuse	Recommended fuse corresponding to the IEC/UL standard
13	Circuit breaker	Recommended circuit breaker corresponding to the IEC/UL standard

### 1AC 200 V ... 240 V device<sup>1)</sup>

Rated data						
P <sub>rated</sub> (HO)		I <sub>H</sub>	Article number		Fans	Frame size
kW	hp	A				
0.12	1/6	0.9	6SL3210-5BB11-2	V1	–	FSAA New
0.25	1/3	1.7	6SL3210-5BB12-5	V1	–	
0.37	1/2	2.3	6SL3210-5BB13-7	V1	–	
0.55	3/4	3.2	6SL3210-5BB15-5	V1	–	FSAB New
0.75	1	4.2	6SL3210-5BB17-5	V1	–	
1.1	1–1/2	6	6SL3210-5BB21-1	V0	1	FSB
1.5	2	7.8	6SL3210-5BB21-5	V0	1	
2.2	3	11	6SL3210-5BB22-2	V0	1	FSC
3	4	13.6	6SL3210-5BB23-0	V0	1	

EMC Standards	
Without integrated filter	U
With integrated line filter category C2 <sup>2)</sup> (only available for FSB and FSC from 1.1 to 3 kW)	A
With integrated filter category C1 <sup>11)</sup> (only available for FSAA and FSAB up to 0.75 kW)	B

### 3AC 380 V ... 480 V device

Rated data					
P <sub>rated</sub> (LO)		I <sub>L</sub> 400 V <sup>3)</sup>	I <sub>L</sub> 480 V	P <sub>rated</sub> (HO)	
kW	hp	A	A	kW	hp
0.37	1/2	1.3	1.3	0.37	1/2
0.55	3/4	1.7	1.7	0.55	3/4
0.75	1	2.2	2.2	0.75	1
1.1	1–1/2	3.1	3.1	1.1	1–1/2
1.5	2	4.1	4.1	1.5	2
2.2	3	5.6	4.8	2.2	3
3	4	7.3	7.3	3	4
4	5	8.8	8.24	4	5
5.5	7–1/2	12.5	11	5.5	7–1/2
7.5	10	16.5	16.5	7.5	10
11	15	25	21	11	15
15	20	31	31	15	20
22	30	45	40	18.5	25
30	40	60	52	22	30

EMC Standards	
With integrated line filter category C3 <sup>5)</sup>	
Without integrated filter	

### 1AC 200 V ... 240 V options

FS	P <sub>rated</sub> (HO) kW	Braking resistor 6SE6400-...	Line reactor 6SE6400-...	Output reactor 6SE6400-...	Shield con- nection kit 6SL3266-...	Line filter class B <sup>6)</sup> 6SL3203-...	Corresponding to the IEC standard		
							Standard fuse <sup>7)</sup>		Circuit breaker <sup>7)</sup>
							Current in A	Article No.	Article No.
FSAA	0.12	4BC05-0AA0	3CC00-4AB3	3TC00-4AD3	1AR00-0VA1	0BB21-8VA0	10	3NA3803	3RV2011-1DA10
	0.25		3CC01-0AB3						3RV2011-1FA10
	0.37								3RV2011-1HA10
FSAB	0.55		3RV2011-1JA10						
	0.75		16	3NA3805	3RV2011-1KA10				
FSB	1.1		4BC11-2BA0	3CC02-6BB3	3TC01-0BD3	1AB00-0VA0	—	20	3NA3807
	1.5	32						3NA3812	3RV2021-4CA10
FSC	2.2	1AC00-0VA0				35		3NA3814	3RV2021-4EA10
	3		4BC12-5CA0	3CC03-5CB3	3TC03-2CD3	50		3NA3820	3RV1031-4FA10

### Accessories

Name	Article number
Parameter loader	6SL3255-0VE00-0UA1 <span>New</span>
BOP interface <sup>8)</sup> (Basic Operator Panel)	6SL3255-0VA00-2AA1 <span>New</span>
Braking module 1AC 230 V: 8 A; 3AC 400 V: 7 A	6SL3201-2AD20-8VA0
V20 BOP (Basic Operator Panel)	6SL3255-0VA00-4BA1 <span>New</span>
BOP cable <sup>9)</sup>	–
SINAMICS Memory Card (512 MB)	6SL3054-4AG00-2AA0
RS485 Terminators (Content 50 Pieces)	6SL3255-0VC00-0HA0
SINAMICS V20 Training case	6AG1067-2AA00-0AB6
DIN Rail Mounting Kit	FSA/FSAA/FSAB: 6SL3261-1BA00-0AA0 <sup>10)</sup> FSB: 6SL3261-1BB00-0AA0
Migration Mounting Kit to fit FSAA/AB to former FSA	6SL3266-1ER00-0VA0

### Spare parts

Frame size	Article number
Replacement fan	
FSA	6SL3200-0UF01-0AA0
FSB	6SL3200-0UF02-0AA0
FSC	6SL3200-0UF03-0AA0
FSD	6SL3200-0UF04-0AA0
FSE	6SL3200-0UF05-0AA0

I <sub>H</sub> 400 V <sup>4)</sup>	I <sub>H</sub> 480 V	Article number		Fans	Frame size
A	A				
1.3	1.3	6SL3210-5BE13-7	V0	–	FSA
1.7	1.7	6SL3210-5BE15-5	V0	–	
2.2	2.2	6SL3210-5BE17-5	V0	–	
3.1	3.1	6SL3210-5BE21-1	V0	1	
4.1	4.1	6SL3210-5BE21-5	V0	1	
5.6	4.8	6SL3210-5BE22-2	V0	1	FSB
7.3	7.3	6SL3210-5BE23-0	V0	1	
8.8	8.24	6SL3210-5BE24-0	V0	1	FSC
12.5	11	6SL3210-5BE25-5	V0	1	
16.5	16.5	6SL3210-5BE27-5	V0	2	FSD
25	21	6SL3210-5BE31-1	V0	2	
31	31	6SL3210-5BE31-5	V0	2	
38	34	6SL3210-5BE31-8	V0	2	FSE
45	40	6SL3210-5BE32-2	V0	2	

- <sup>1)</sup> Single-phase devices can also be connected to two phases of a 3-phase 230 V supply system.  
You can find detailed information here:  
<http://support.industry.siemens.com/cs/document/109476260>
- <sup>2)</sup> EN61800-3 Category C2, 1<sup>st</sup> environment (residential domestic)
- <sup>3)</sup> The output current I<sub>L</sub> is based on the duty cycle for low overload (LO).
- <sup>4)</sup> The output current I<sub>H</sub> is based on the duty cycle for high overload (HO).
- <sup>5)</sup> EN61800-3 Category C3, 2<sup>nd</sup> environment (industry)
- <sup>6)</sup> See specification of EMC standards, page 10
- <sup>7)</sup> Additional information about the listed fuses and circuit breakers can be found in Catalogs LV 10, IC 10 and IC 10 AO  
<http://siemens.com/drives/infocenter>
- <sup>8)</sup> BOP interface and BOP integrated standard RJ45 connector compatible for standard Ethernet cable.
- <sup>9)</sup> The cable is not included in the delivery.  
You can use any standard LAN cable with standard RJ45 connector.
- <sup>10)</sup> Installation of FSA with fan, please refer to SINAMICS V20 manual.  
Installation of FSAA/AB, DIN Rail Mounting Kit for FSA install with Migration Mounting Kit together.
- <sup>11)</sup> EN61800-3 category C1, 1<sup>st</sup> environment (residential).

### 3AC 380 V ... 480 V options

FS	P <sub>rated</sub> (LO) kW	P <sub>rated</sub> (HO) kW	Braking resistor 6SL3201-...	Line reactor 6SL3203-...	Output reactor 6SL3202-...	Shield connection kit 6SL3266-...	Line filter class B <sup>9)</sup> 6SL3203-...	Corresponding to the IEC standard		
								Standard fuse <sup>7)</sup>		Circuit breaker <sup>7)</sup>
								Current in A	Article No.	Article No.
FSA	0.37	0.37	0BE14-3AA0	0CE13-2AA0	0AE16-1CA0	1AA00-0VA0	0BE17-7BA0	6	3NA3801	3RV2011-1CA10
	0.55	0.55								3RV2011-1DA10
	0.75	0.75								3RV2011-1EA10
	1.1	1.1								3RV2011-1FA10
	1.5	1.5								10
	2.2	2.2	0BE21-0AA0	0AE18-8CA0	16	3NA3805	3RV2011-1JA10			
FSB	3	3	0BE21-8AA0	0CE21-8AA0	0AE21-8CA0	1AB00-0VA0	0BE21-8BA0	20	3NA3807	3RV2011-1KA10
	4	4								3RV2021-4AA10
FSC	5.5	5.5	0BE21-8AA0	0CE21-8AA0	0AE23-8CA0	1AC00-0VA0	0BE23-8BA0	32	3NA3812	3RV2021-4BA10
FSD	7.5	7.5	0BE23-8AA0	0CE23-8AA0		1AD00-0VA0		–	–	3VL1103-1KM30-0AA0
	11	11						–	–	3VL1104-1KM30-0AA0
	15	15			–		–	3VL1105-1KM30-0AA0		
			6SE6400-...	6SL3203-...	6SE6400-...	6SL3266-...	6SL3203-...			
FSE	22	18.5	4BD21-2DA0	0CJ24-5AA0	3TC05-4DD0	1AE00-0VA0	0BE23-8BA0	63	3NA3022	3VL1108-1KM30-0AA0
	30	22		0CD25-3AA0			0BE27-5BA0	80	3NA3024	3VL1108-1KM30-0AA0

### Selecting SIMATIC S7-1200 PLC for SINAMICS V20

CPU			Communication module	
	Article number		RS485 communication for USS or Modbus RTU	Article number
CPU 1211C	1211 CPU AC/DC/Rly	6ES7 211-1BE40-0XB0	CB 1241 RS 485 or CM 1241 RS 485/422	6ES7241-1CH30-1XB0 or 6ES7241-1CH32-0XB0
	1211 CPU DC/DC/DC	6ES7 211-1AE40-0XB0		
	1211 CPU DC/DC/Rly	6ES7 211-1HE40-0XB0		
CPU 1212C	1212 CPU AC/DC/Rly	6ES7 212-1BE40-0XB0		
	1212 CPU DC/DC/DC	6ES7 212-1AE40-0XB0		
	1212 CPU DC/DC/Rly	6ES7 212-1HE40-0XB0		
CPU 1214C	1214 CPU AC/DC/Rly	6ES7 214-1BG40-0XB0		
	1214 CPU DC/DC/DC	6ES7 214-1AG40-0XB0		
	1214 CPU DC/DC/Rly	6ES7 214-1HG40-0XB0		
CPU 1215C	1215 CPU AC/DC/Rly	6ES7 215-1BG40-0XB0		
	1215 CPU DC/DC/DC	6ES7 215-1AG40-0XB0		
	1215 CPU DC/DC/Rly	6ES7 215-1HG40-0XB0		
CPU 1217C	1217 CPU DC/DC/DC	6ES7 217-1AG40-0XB0		

The shown SIMATIC S7 selection is only a suggestion. For detailed and further information please refer to the SIMATIC S7-1200 brochure, catalog or web page:  
<http://siemens.com/simatic-s7-1200>

# System at glance

## SINAMICS V20

3AC 380 V ... 480 V

1AC 200 V ... 240 V

1AC 200 V ... 240 V



FSA

FSAB

FSA

FSB

FSC

FSD

FSE



SINAMICS V20 BOP  
(Basic Operator Panel)



SINAMICS V20  
BOP interface



SINAMICS V20  
Parameter loader



SINAMICS V20  
Braking module

## SINAMICS V20 – Options




Braking resistor



Line reactor



Output reactor



Shield connection kit



Line filter



Standard fuse



Circuit breaker



Replacement fan



Standard LAN cable

**There's more to it:**  
**[siemens.com/ids](http://siemens.com/ids)**

**Discover in detail how  
Integrated Drive Systems boost  
your competitive edge and  
improve your time to profit.**

**Integrated  
Drive Systems  
to go: Visit our  
mobile site!**



**Follow us on:**  
**[www.twitter.com/siemensindustry](https://www.twitter.com/siemensindustry)**  
**[www.youtube.com/siemens](https://www.youtube.com/siemens)**

**Published by  
Siemens AG 2016**

Digital Factory  
P.O. Box 31 80  
91050 Erlangen, Germany

Article No. E20001-A90-P670-V7-7600  
Printed in Germany  
Dispo 21500  
D&M/79697 WS 04168.0

Subject to changes and errors.

The information given in this document only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. The requested performance features are binding only when they are expressly agreed upon in the concluded contract.

For the secure operation of Siemens products and solutions, it is necessary to take suitable preventive action (e.g. cell protection concept) and integrate each component into a holistic, state-of-the-art industrial security concept. Third-party products that may be in use should also be considered.

For more information about industrial security, visit

**<http://www.siemens.com/industrialsecurity>**